



zhub




Patented clamp design  
to maneuver between  
privacy panels


Slide off clamp for portability



# Product Overview

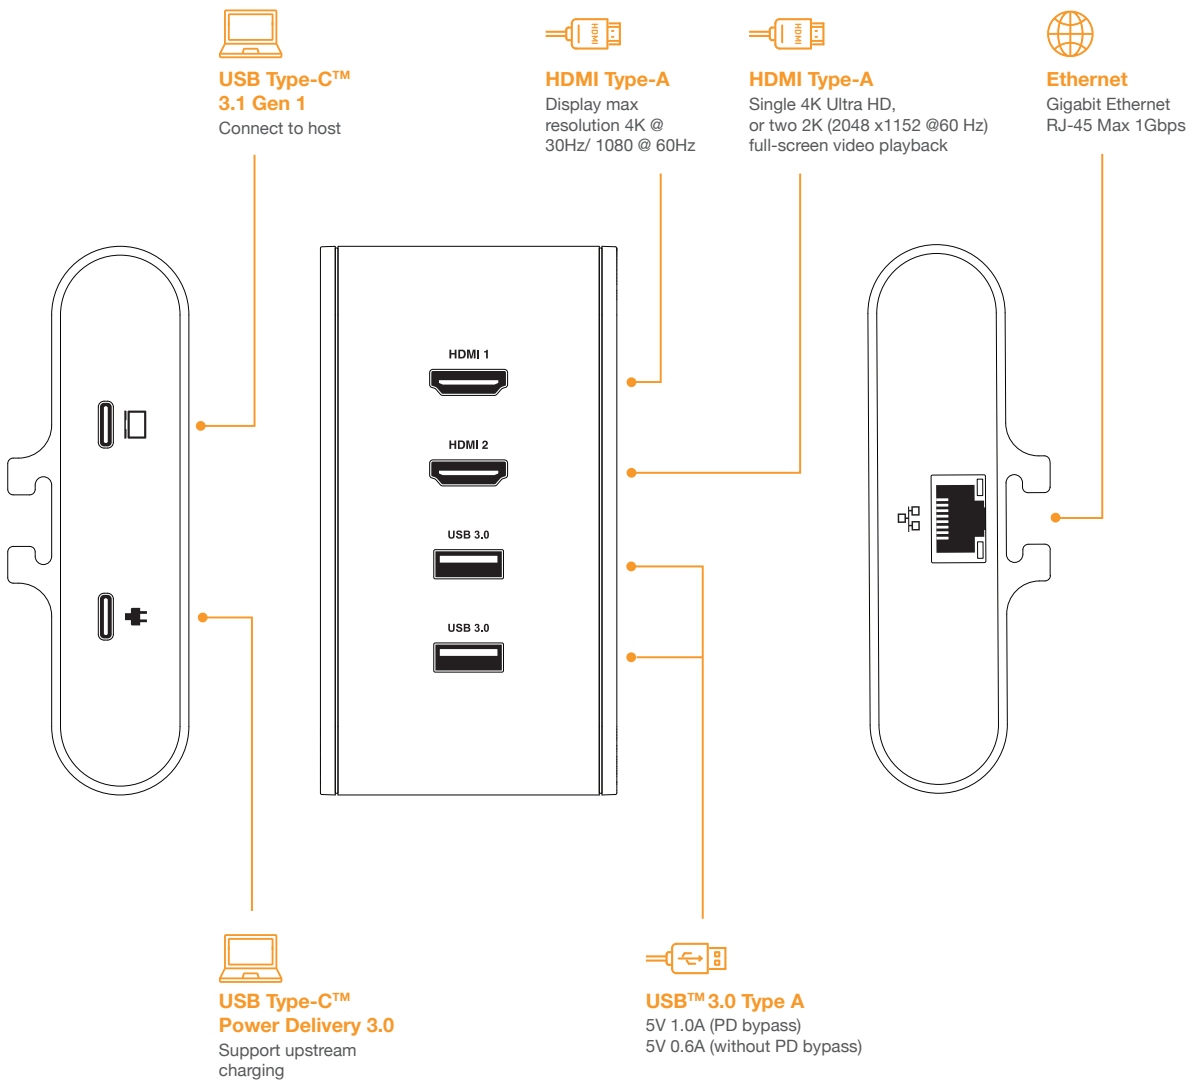

\*Important: Only use USB-C cable provided with unit, other cables may void product warranty



## Support Dual Display

Dual video docking Station supports most docking requirements



## Compact and Light weight Clamp

Easily clamps from above the desk to secure Zhub



## Cost Effective Solution

Inexpensive compact and practical

Upstream input to host	USB-C full feature, USB-3.1 Gen 1
Power Delivery pass through	USB-C, 60W max for notebook charging
Downstream data ports	2x USB-3.1 Gen 1, Combine 5V, 0.6A max (without PD pass through) Combine 5V, 1.0A max (with PD pass through)
LAN port	RJ45 Gigabit port (10M/100M /1000M) Connection: Green and Amber Active: Green blinking
Downstream video out ports	1x HDMI (3840x2160p max, 30Hz) 2x HDMI (1920x1080p max, 60Hz)  <small>Note: 2x HDMI cannot be displayed with Mac OS as Displayport Multistream is not supported.</small>
System Requirements	Windows 7, Windows 8, Windows 8.1, Windows 10 (32bit/64 bit), Mac OS: V10.12.6  <small>Note: It is recommended to use Windows 10 as USB-C is native to windows 10 System.</small>
Temperature Range	Operating: 0°C to 35°C Non-operating Storage: -20°C to 60°C
Relative Humidity	Operating: 10% to 80% (non-condensing) Non-operating Storage: 5% to 90% (non-condensing)
Clamp Thickness Range	12-42mm



White



Silver



Black

